

# SPEEDSTILE FP

**DS** series



PRODUCT DATA

# SPEEDSTILE FP DS<sup>series</sup>

## Full Panel Speed Gate for Internal Installation

Motorised full glass sliding leaves 1.2 or 1.8m height

Architects and Interior Designers have always been at the forefront in introducing new materials. Gunnebo embraces this philosophy in the SpeedStile DS series with exciting new materials, selection of finishes and lighting effects. Finishes and ergonomic shapes that capture the designer's imagination. A new stylish and flexible design able to virtually blend infinite aesthetics within architectural interior needs, still including security features and performances from Gunnebo experience.

Applications are wherever high aesthetics is a must. Applications include Government, Finance, Banking, Retail, Telecommunications, Information Technology, Publishing, Leisure, Education....

### MODE OF OPERATION

Passage in one or both directions is electronically controlled. On receiving a signal from the access control system, or remote control, the wings open (Normally Closed NC).

If an unauthorised person tries to tailgate or attempts to enter from the opposite direction, the in-built alarm system is activated. If within the pre-set timeout no passage has occurred the lane will close and reset.



Normally Closed



**Normal Use**  
(steady)

**Alarm Conditions**  
(flashing)



**Green arrow**  
Authorised use or designated free passage  
Proceed through the unit

Emergency / Fire exit



**Red cross**  
(Unit in use or no passage)  
Passage not authorised

Alarm, fraudulent condition or technical alarm



**Standard**

•	•	•	•	•	•	○	○	○
---	---	---	---	---	---	---	---	---

**Wide**

•	•	•	•	•	•	○	○	•	•	•
---	---	---	---	---	---	---	---	---	---	---

Plain dot indicates the functionality is implemented, empty dot indicates some limitations, no dot indicates not available.

### SECURITY FEATURES



Tailgating/piggybacking attempt



Wrong way direction/intrusion attempt

Fraud Detection through sophisticated and proven algorithm

- Intrusion
- Tailgating
- Piggybacking
- Wrong way direction
- Leave aisle timeout



### SAFETY FEATURES

- Safety force sensing
- Safety rubber edges
- Accurate presence sensing
- Emitter/receiver infrared sensors technology
- Logic voltage 24 Vac

- Voltage free contact input for Fire Alarm fail state
- Fail-Safe mechanical opening (option)
- Fail-Safe via battery back-up opening (option)
- Wide walkway for wheel chair or easier access
- Accompanied wheelchair or child passage management

For security and safety reasons children must be supervised by an adult at all times in the vicinity of an active lane.  
Any child being escorted through the lane must always precede the accompanying adult during passage.

## DESIGN / CONSTRUCTION

**DS series** modern and stylish design, steel frame construction with robust technopolymer shells and inlay to allow a vast selection of finishes and customisation.

**Short cabinet length (N/C)**

**1.2m panel height**

**1.8m panel height**

**Standard** passage way 550mm and **Wide** passage (900mm) available. Available also as **Combi** - centre cabinet with narrow (550mm) passage in one side and wide (900mm) passage on the other side




In order to create a lane it is necessary to have one right and one left cabinet. To create more than one lane, use one or more centre or combi cabinets. Select cabinets according to the number of lanes and passage width desired.

Two lane configuration comprising of 1N°L, 1N°C and 1N°R cabinets



Two lane configuration comprising of N°1 LW, 1N°CLW and 1N°R cabinet.



LED way-mode indicators flush mounted within the end leg, with illuminated symbols.



**Green Arrow**



**Red Cross**

LED red-green indicators horizontal and vertical into the walkway.

LED strips illuminating the plinth (option)

## FINISHES / CUSTOMISATION

**DS series** includes applied chrome mirror finishing for the cabinet plinth and applied Grey Aluminium for the inlay, technopolymer sides pearl white gloss finish, wings 12mm toughened glass with rubber safety edge.


Standard finishes further comprise:

*Side Panels optional finishes selection*

*Lid, End Legs inlay*

*Applied finishes*

*Carbon Fibre Black, White, Dark Mahogany effect and Light Maple effect and more available*

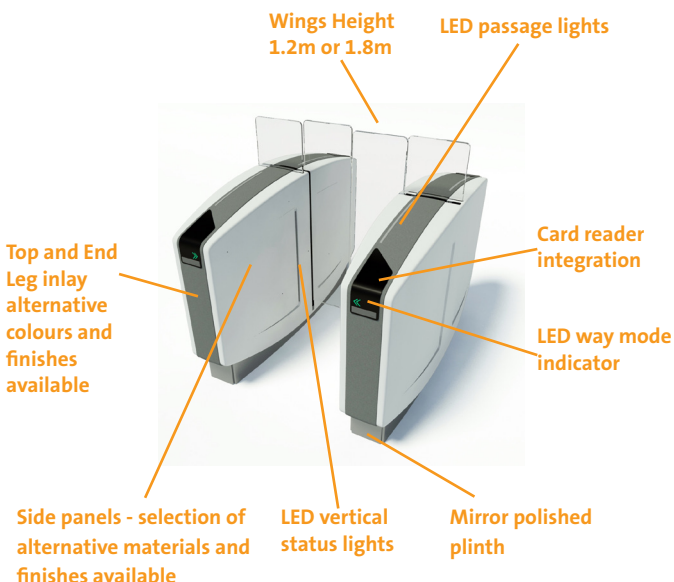


Gloss White (RAL 9016)



Gloss Burnt Orange (RAL 2009)




Gloss Intense Blue (RAL 5017)



Gloss Light Ivory (RAL 1015)




Matt Black (RAL 9005)



Satin Pearl White (RAL 9003)



Gloss Anthracite (RAL 7012)



Gloss Red Metallic (RAL 3003)




Grey Aluminium (RAL 9007)



Matt Brown Metallic (RAL 8028)




Matt Charcoal Metallic (RAL 9004)



Applied finish White Carbon fibre



Applied finish Black Carbon Fibre



Applied finish Dark Mahogany effect



Applied finish Light Maple effect

## OPTIONS & ACCESSORIES

- DS series finishes and materials
- LED lighting effects
- Card reader integration
- Battery back-up
- Digital LCD counter
- Remote control systems

## ACCESS SPECIFICATIONS

Flow rates by type of Reader (1)			Disabled Access	Emergency Egress
Insertion Type	Swipe	Proximity		
20 PASSAGES / MN	30 PASSAGES / MN	40 PASSAGES / MN	● (2)	●

- (1) Approximate figures
- (2) 900mm net passage way and algorithm able to manage wheelchair access


## ELECTRICAL DATA & CONDITIONS OF USE

Power Supply	Power Rating	Battery Back-up	Fire Signal	Operating Temperature	IP Rating	Noise Level
230VAC 50HZ(1)	2VA STAND BY 345VA IN OPERATION	FOR 1 LAST OPERATING CYCLE(2)	INPUT FOR VOLTAGE FREE CONTACT	+5°C TO +40°C RH 95% NO CONDENSING	IP20	LESS THAN 55dB(2)

- (1) 115Vac 60Hz also available
- (2) Option
- (3) Note: Average background noise in office environment is 50-55dB

## DIMENSIONS & WEIGHTS

	Overall Height	Passage Width	A Cabinet Height	B Cabinet Length	C Cabinet Width	Weight (kg)	
						Side Cabinet	Centre Cabinet
STANDARD SHORT LANE	1200/1800	550	950	1448	300	170	220
WIDE SHORT LANE	1200/1800	900	950	1448	490	185	240



dimensions in (mm), weight net (kg), might require lifting equipment. For details refer to installation detail drawings

## INSTALLATION & MAINTENANCE

Product Delivery	Application	Site Preparation (1)	Cabling & Conduits (2)	Control Board Location	Systems Integration(5)	Maintenance Access	MTTR(3)	MCBF(4)
FULLY ASSEMBLED	INDOOR	FLAT & LEVEL FINISHED FLOOR +/- 5mm	THROUGH THE GROUND	IN MASTER SPEEDSTILE CABINET	27 DIGITAL INTERFACE I/O RS232 RS485 SETTINGS PROGRAMMABLE VIA PARAMETERS	THROUGH LATERAL PANELS	LESS THAN 30 MINUTES	4 MILLION

- (1) Bolting depth MIN 70mm, concrete MIN fckcube30N/mm2 resistance, MIN 1500 mm x 500 (750 for wide and combi) x 150 mm deep
- (2) Running MIN 140mm below finished floor level, should rise MIN 50mm from foundation
- (3) Mean time To Repair
- (4) Mean Cycle Between Failure
- (5) Potential free contact for card reader input.  
New Electronic Platform with in-built RS485 and COMR1 switching interface.

It is the customer's responsibility to ensure the structural integrity and strength of the installation location. Data provided is for information only, please refer to your usual Gunnebo Customer Service contact in order to prepare the installation site.

THE JOURNEY TOWARDS A SAFER FUTURE STARTS AT THE ENTRANCE

### CONTACT US FOR MORE INFO

Gunnebo Entrance Control Ltd  
 Bellbrook Business Park, Uckfield, TN22 1QQ  
 United Kingdom  
 Tel. +44 1825 761 022  
 Email. info.entrancecontrol@gunnebo.com  
 Web. www.speedstile.com

